

## Installation Instructions for Swivel Pockit®





1. Determine location of lights and transformer. Install transformer and terminal block in place.
2. Drill 2-5/8" (67mm) hole to install light. Be sure to remove rough areas at edge and inside hole. *Note: Order Tresco #DBSC67 hole saw with #DBSC3 mandrel for convenient installation.*
3. Feed wires through hole and push Swivel Pockit® into place.
4. Complete wiring installation to transformer. Push needle ends of wire completely into snap connector until they are seated into the plastic.
5. Snap connector into wiring block.

Note: Transformer can supply power to a maximum of (3) 20W Pockits® or (6) 10W lights. If more than 60W of lighting is plugged into the block, the transformer will shut off using an internal overload protection device. The device resets automatically after a period of time.



## Installation Instructions for Tresco® International Swivel Pockit® Lighting

Tresco International's Swivel Pockit® Lighting is designed to recess mount into a solid surface and hold in place using spring clips. Wiring attaches to Tresco ELT60-CON 12V transformer. Transformer is sold separately.

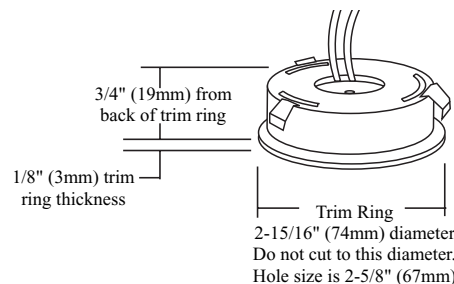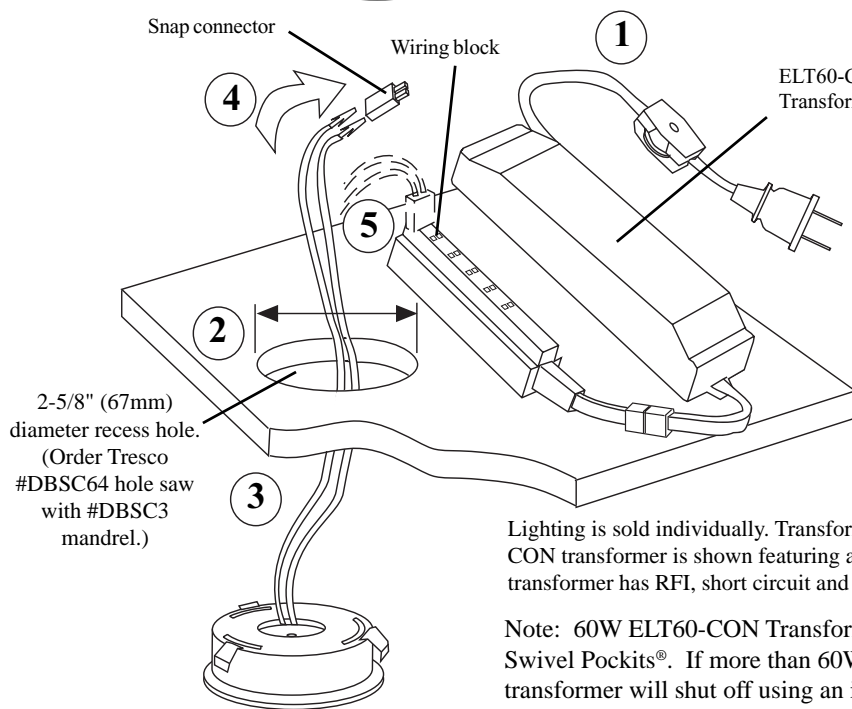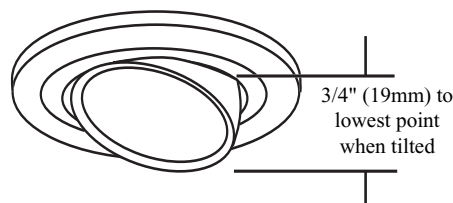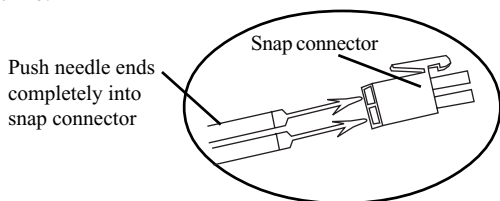

Lighting is sold individually. Transformer is required (sold separately). Tresco 12V ELT60-CON transformer is shown featuring a snap-connect wiring block for lights. ELT60-CON transformer has RFI, short circuit and overload protection, and 7' cord with on/off switch.

Note: 60W ELT60-CON Transformer can supply power to a maximum of (3) 20W Swivel Pockits®. If more than 60W of lighting is plugged into the block, the transformer will shut off using an internal overload protection device. The device resets automatically after a period of time.

### Extension Cords for lights:

- For lighting installations where the light must be located farther than the standard cord will allow, extension cords may be purchased. Cords are available in 1 meter, 2 meter, or 3 meter lengths. Note: Maximum length of cord from transformer to light should be 5 meters. Longer cords could result in poor light quality.

## IMPORTANT SAFETY INSTRUCTIONS

CAUTION: To reduce the risk of fire, electric shock, exposure to excessive UV radiation or injury to persons:

- Use 10 or 20W bulb.
- Before replacing bulb, turn light off (or unplug) and allow bulb to cool. Use a soft cloth to handle bulb as skin oil may damage bulb.
- Bulb gets hot. Do not touch bulb, lens, lens holder or enclosure when system is in use.

- Do not look directly at bulb.
- Do not operate system if lens is missing or damaged.

This light is intended to be used as a cabinet light on wood, particle board or other structurally sound, heat resistant surface. Care should be taken during and after installation to avoid contact of light with wiring, cord, or any combustible material.



Save these instructions for future reference.

For technical assistance: **1-800-227-1171**

[www.trescointernational.com](http://www.trescointernational.com) [tresco@cboss.com](mailto:tresco@cboss.com)

trswvpocinst 8/2000 ¥ upd 1/03