



See Stellar literature for Color Availability

Installation Instructions Stellar® Halogen Lighting




Long Arch (LA), High Arch (HA), and Flat Arm (FA) Models

Tresco International's Stellar Lighting is designed to mount to the top of a cabinet or shelf. The light is held into place by two (2) screws provided. Wires must be routed from the light and attached to the remotely mounted Tresco International 12V transformer (ELT60-CON, sold separately).

To install Tresco International Stellar Lighting:

Before beginning any wiring, be sure power is turned OFF to transformer:

1. Plan where to install light. Be sure wires will reach wiring block on transformer (also see transformer installation instructions on back). Extension cords are available (see Accessories below). Transformer supplies power to 60W maximum: (3) 20W lights per transformer. Minimum load 20W.
2. Drill 1/16" pilot hole for mounting. Mount using (2) screws provided.
3. Push needle ends of wires completely into snap connector until they are seated into place.
4. Plug snap connector into wiring block of transformer.
5. Using a soft cloth to hold bulb, push bulb into place into head of light.
6. Turn power on to transformer.

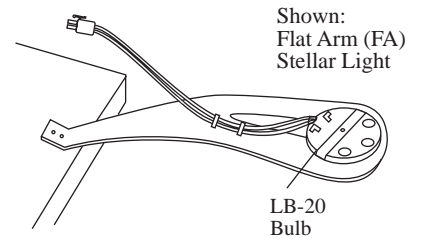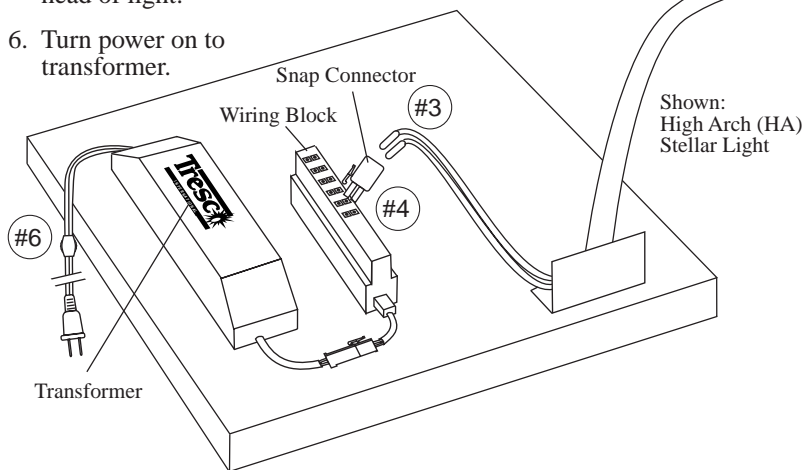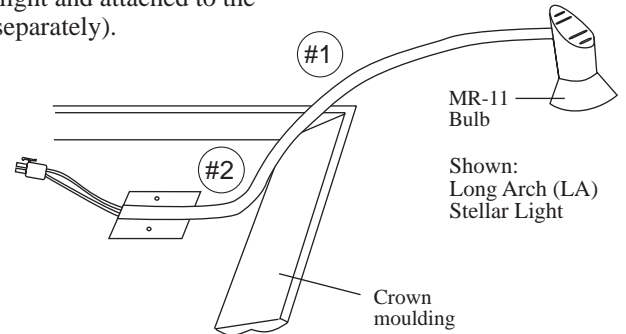

IMPORTANT SAFETY INSTRUCTIONS

CAUTION: To reduce the risk of fire, electric shock, exposure to excessive UV radiation or injury to persons:

- Use maximum 20W bulb.
- Before replacing bulb, turn off (or unplug) and allow bulb to cool. Use a soft cloth to handle bulb as skin oil may damage bulb.
- Do not look directly at bulb.
- Do not operate system if lens is missing or damaged.

This light is intended to be used as a cabinet light on wood, particle board or other structurally sound, heat resistant surfaces. Avoid contact with the cord or any combustible material. Care should be taken during installation to avoid contact of light with wiring or cord.

See ELT60-CON transformer installation instructions on reverse side.

Accessories available from Tresco International:

- **Touch Dimmer** - Uses a conveniently located touch pad to turn lighting Lo/Med/Hi/Off. Can control up to three transformers and their lights.
- **Switch Kits** - Toggle or interior switch for On/Off control.
- **12V Extension Cords** - 1, 2 and 3 meter cords. Maximum recommended length from light to transformer is 5 meters.

Save these instructions for future reference.
For technical assistance: 1-800-227-1171



Tresco International Ltd. Co.
P.O. Box 5100
Poland, Ohio USA 44514

Tel: 800-227-1171
Fax: 800-841-2523
Tel: 330-549-2230
Fax: 330-549-2260

E-mail: custsvc@trescointl.com
Web: www.trescointernational.com