



Color Availability:

- White

Installation Instructions

for Tresco International's ELT60-CON Transformer Kit

Tresco International offers the ELT60-CON soft-start Transformer for its 12V lighting systems. The ELT60-CON step-down transformer has primary input of 120V with output of 12V/60W and provides RFI, short circuit and overload protection. The transformer comes with a quick connect wiring block to snap-lock up to (6) 10W lights or (3) 20W lights. The ELT60-CON transformer is placed between 120V hard wiring or receptacle and the selected Tresco lighting system. (See separate installation sheets for specific lighting systems). Tresco International also offers switches and a dimmer to control 12V lighting (see accessories list below).


To install Tresco International Transformer:

Before beginning any wiring, be sure power is turned OFF to transformer.

1. After lights are planned, locate transformer in an area where it can be securely mounted and receives **adequate ventilation**.
2. If transformer must be located farther than length of cord on lights, 12V extension cords are available in 1, 2 and 3 meter lengths. Contact Tresco International for purchase.
3. Plug lights into wiring block.
4. Turn power on to transformer.


Note: Transformer can supply power to a maximum of (6) 10W or (3) 20W lights. If more than 60W of lighting is plugged into the block, the transformer will shut off using an internal overload protection device. The device resets automatically after a period of time (Transformer has 20W min. load requirement).

Typical Applications: Optional Switch and Dimmer Controls

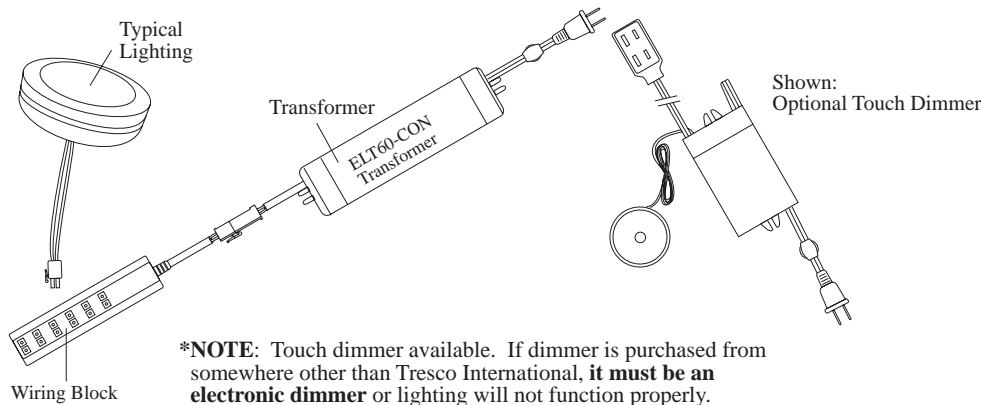

Transformer Kit Includes:

- ELT60-CON transformer
- Wiring block
- 7' power cord with on/off switch (removable)

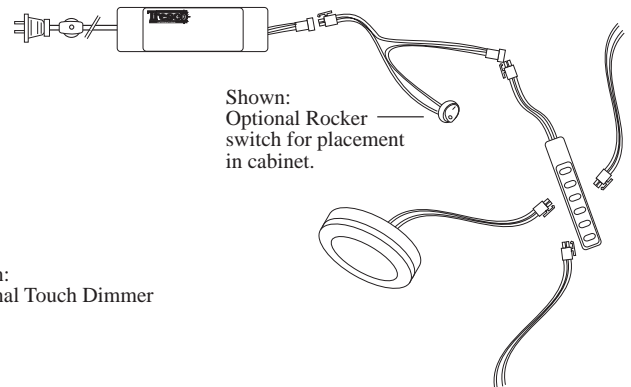

Typical Switch option shown:
Installing Switch kits in this location allows all lights from transformer to be controlled by one switch. See details on switch kits and dimmer* installation instructions for additional options.

Accessories available from Tresco International:

- **Touch Dimmer** - Uses a conveniently located touch pad to turn lighting Lo/Med/Hi/Off. Can control up to three transformers and their lights.
- **Switch Kits** - Toggle or interior switch for On/Off control.
- **12V Extension Cords** - 1, 2 and 3 meter cords. Maximum recommended length from light to transformer is 5 meters.

Save these instructions for future reference.
For technical assistance: 1-800-227-1171



Tresco International Ltd. Co.
P.O. Box 5100
Poland, Ohio USA 44514

Tel: 800-227-1171
Fax: 800-841-2523
Tel: 330-549-2230
Fax: 330-549-2260

E-mail: custsvc@trescointl.com
Web: www.trescointernational.com